


SQUIRE PARK REDEVELOPMENT


SCHEMATIC DESIGN UPDATE

MARCH 19, 2026



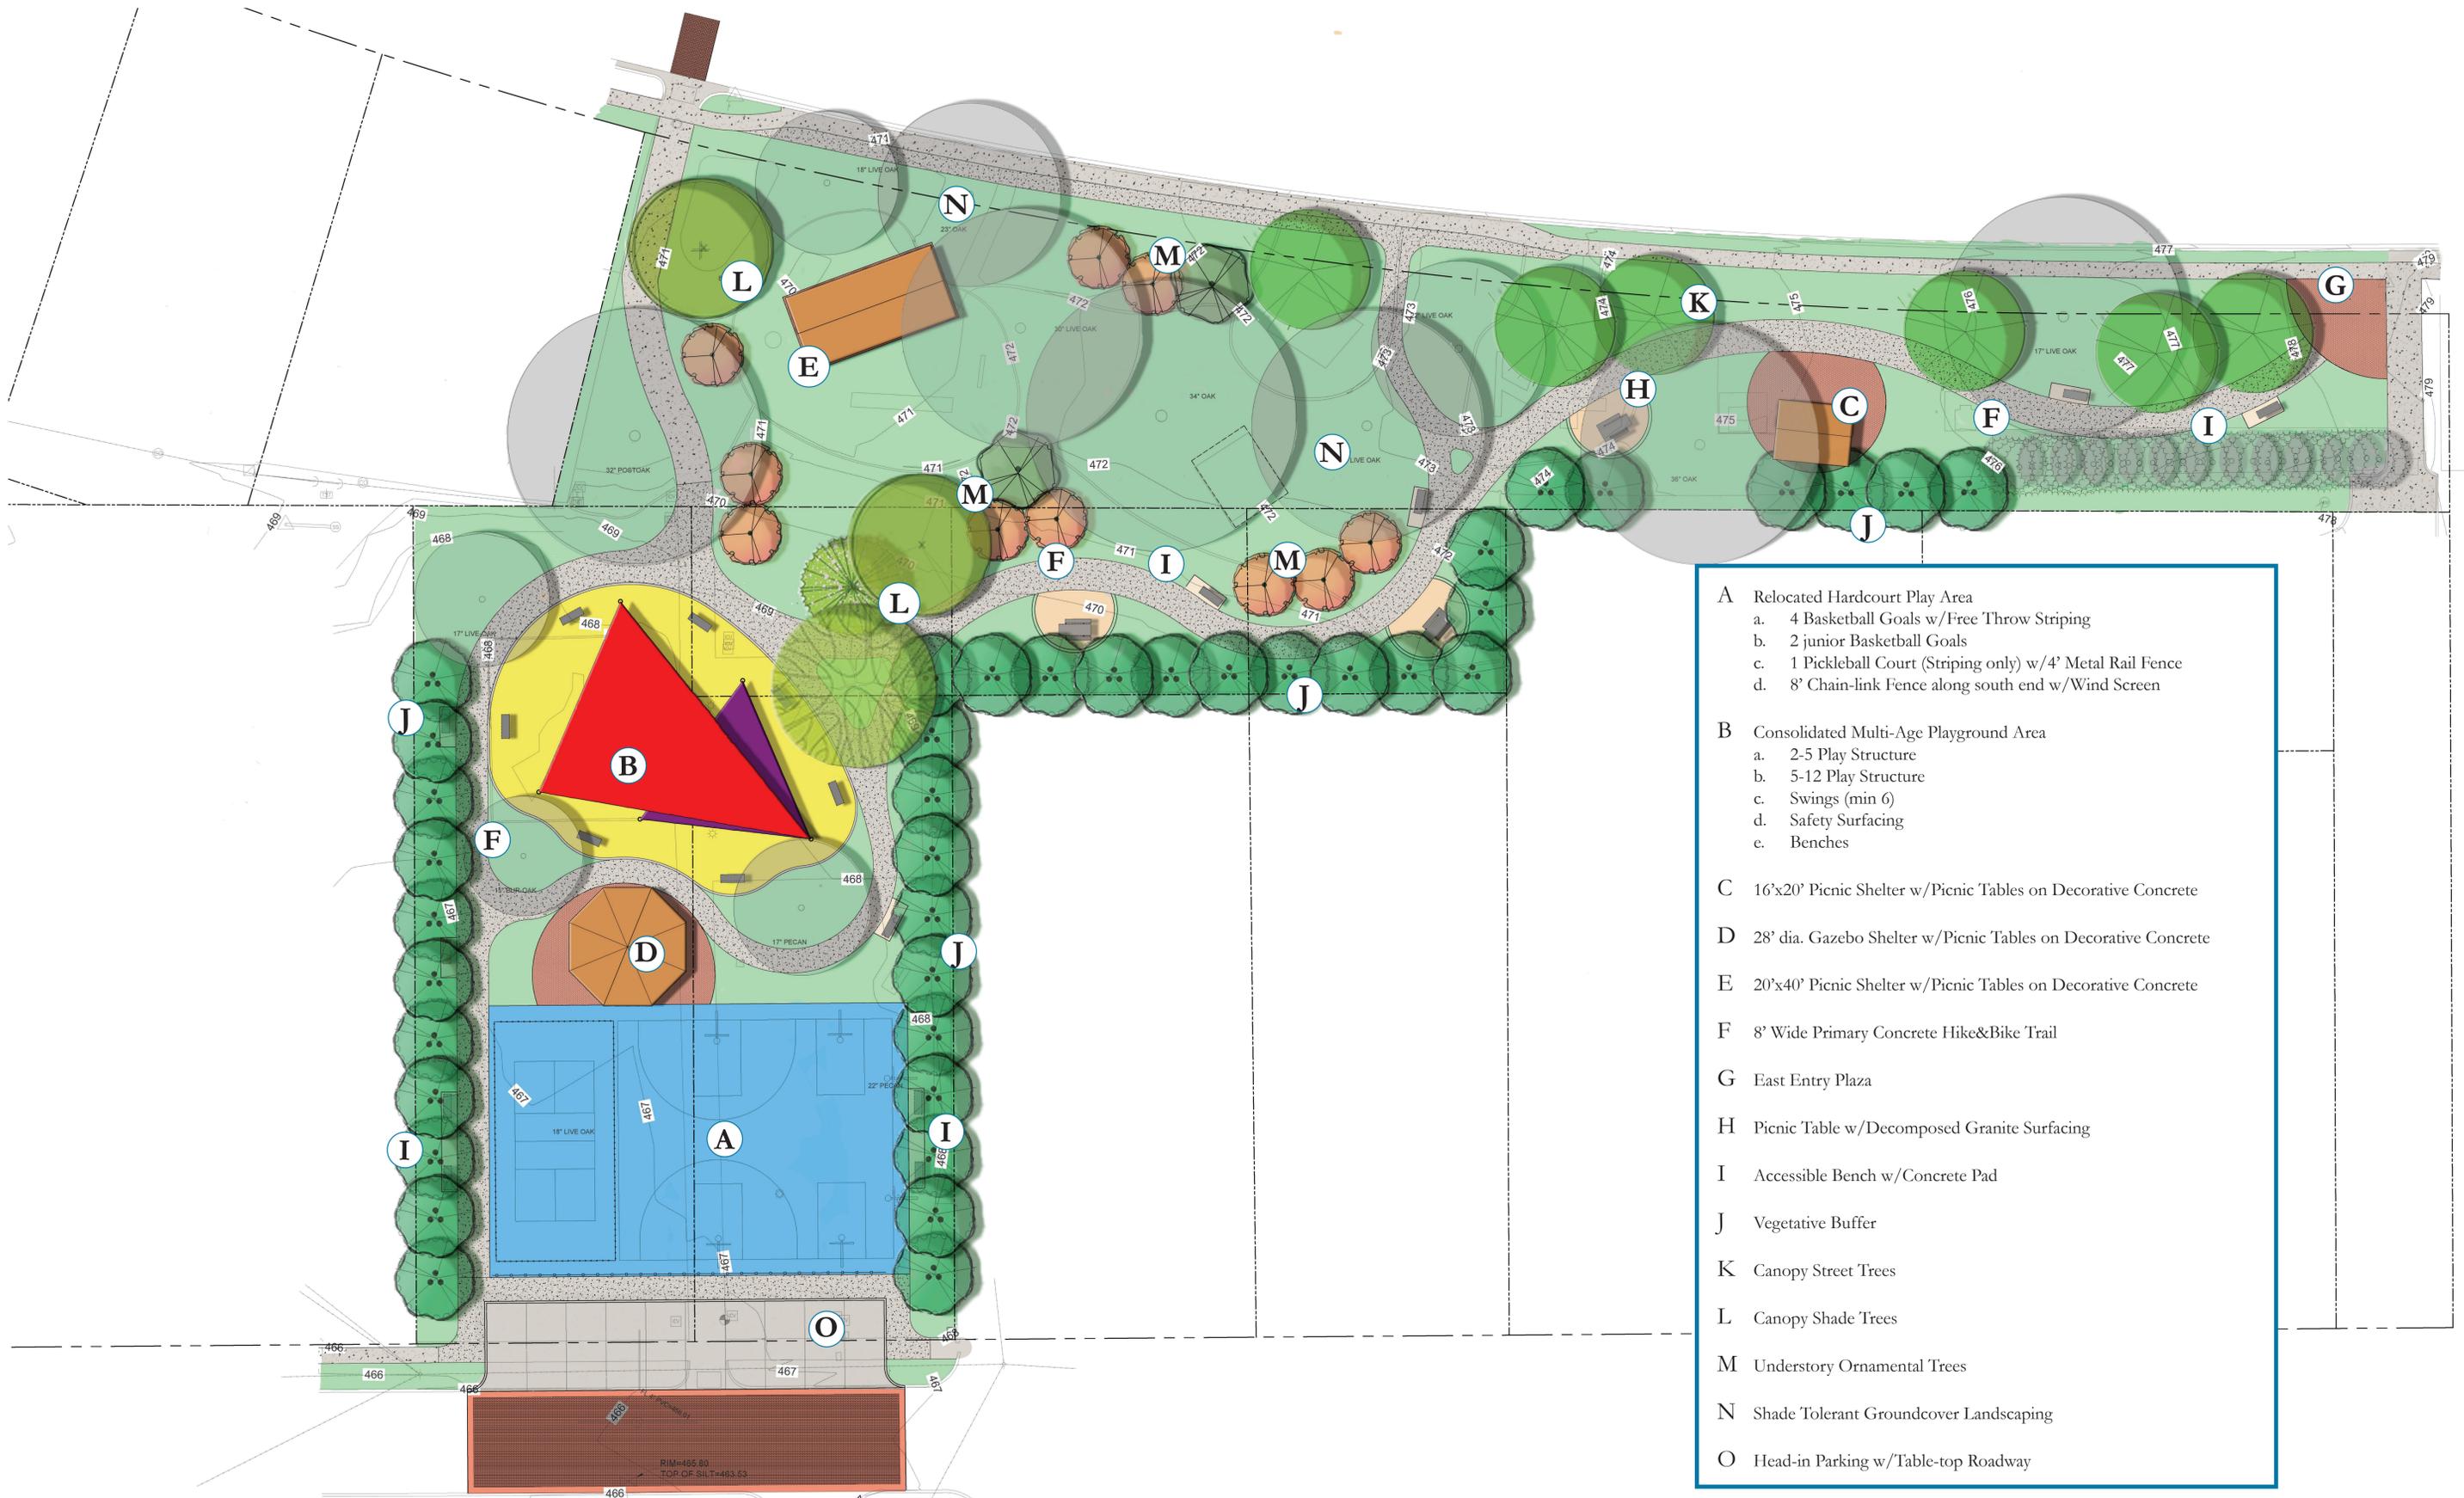

- A Relocated Hardcourt Play Area
 - a. 4 Basketball Goals w/Free Throw Striping
 - b. 2 junior Basketball Goals
 - c. 1 Pickleball Court (Striping only) w/4' Metal Rail Fence
 - d. 8' Chain-link Fence along south end w/Wind Screen
- B Consolidated Multi-Age Playground Area
 - a. 2-5 Play Structure
 - b. 5-12 Play Structure
 - c. Swings (min 6)
 - d. Safety Surfacing
 - e. Benches
- C 16'x20' Picnic Shelter w/Picnic Tables on Decorative Concrete
- D 28' dia. Gazebo Shelter w/Picnic Tables on Decorative Concrete
- E 20'x40' Picnic Shelter w/Picnic Tables on Decorative Concrete
- F 8' Wide Primary Concrete Hike&Bike Trail
- G East Entry Plaza
- H Picnic Table w/Decomposed Granite Surfacing
- I Accessible Bench w/Concrete Pad
- J Vegetative Buffer
- K Canopy Street Trees
- L Canopy Shade Trees
- M Understory Ornamental Trees
- N Shade Tolerant Groundcover Landscaping
- O Head-in Parking w/Table-top Roadway

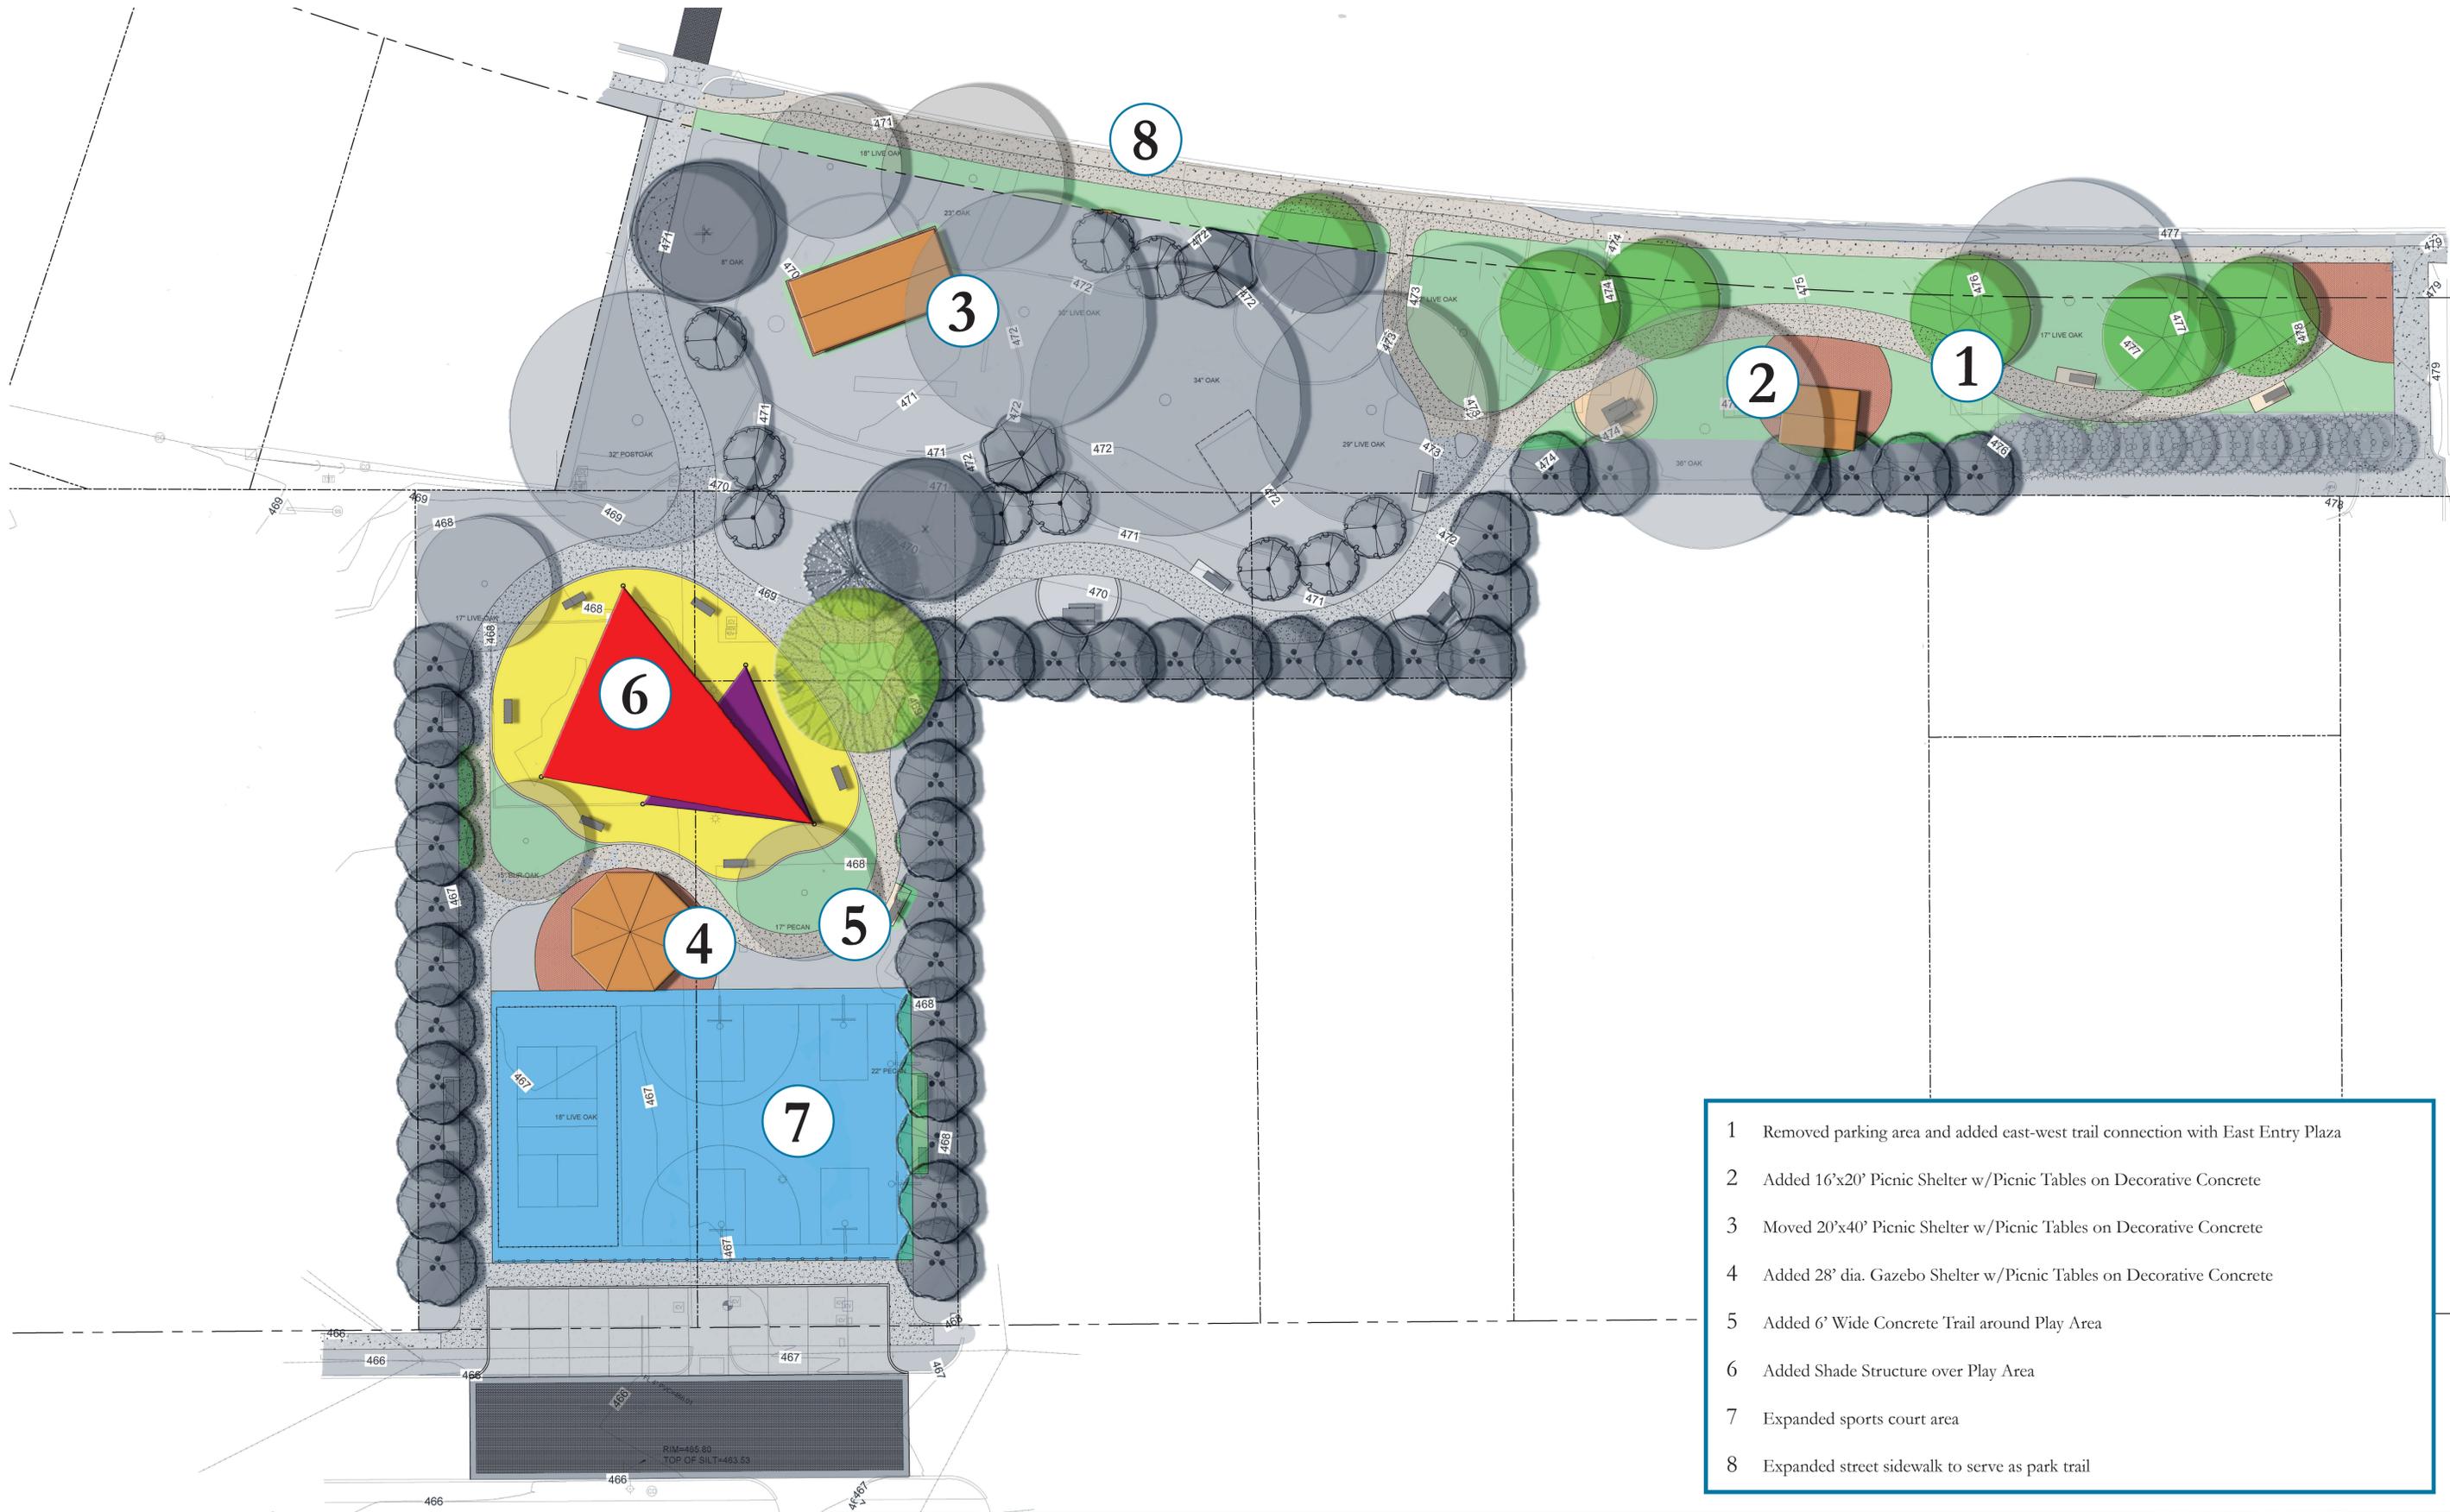

- 1 Removed parking area and added east-west trail connection with East Entry Plaza
- 2 Added 16'x20' Picnic Shelter w/Picnic Tables on Decorative Concrete
- 3 Moved 20'x40' Picnic Shelter w/Picnic Tables on Decorative Concrete
- 4 Added 28' dia. Gazebo Shelter w/Picnic Tables on Decorative Concrete
- 5 Added 6' Wide Concrete Trail around Play Area
- 6 Added Shade Structure over Play Area
- 7 Expanded sports court area
- 8 Expanded street sidewalk to serve as park trail

BASE PARK IMPROVEMENTS

◇ Playground	\$650,000-\$900,000
• Structures	\$300,000-\$500,000
• Shade Structure	\$200,000
• Surfacing (Poured-in-Place).....	\$120,000
• Drainage.....	\$15,000
◇ Sports Court	\$250,000
◇ Trails	\$125,000
◇ Site Furnishings	\$125,000
◇ Landscape	
• Canopy Trees.....	\$30,000
• Buffer Trees.....	\$58,500
◇ Lighting.....	\$100,000

Project Budget

\$1,790,000

- Budget total includes Mobilization, General Conditions, Permitting, Insurance, Project Management, Testing, Storage, Fencing & Barricades, Erosion Control, Demolition, and General Sitework, Utilities, and Earthwork
- Budget includes 15% Contingency

ADDITIONAL/FUTURE OPTIONS

PARK IMPROVEMENTS

◇ Park Shelters	
• 20'x40' Pavilion.....	\$125,000
• 28' dia Gazebo Shelter	\$92,500
• 16'x20' Shelter	\$55,000
◇ Landscaping.....	\$250,000
◇ Irrigation	\$125,000

PARKING IMPROVEMENTS

◇ Head-in Parking	\$52,000
-------------------------	----------

Master Plan Budget

\$2,678,000

- Budget total includes Mobilization, General Conditions, Permitting, Insurance, Project Management, Testing, Storage, Fencing & Barricades, Erosion Control, Demolition, and General Sitework, Utilities, and Earthwork
- Budget includes 15% Contingency



NEXT STEPS

- ◇ Review concepts with Council
- ◇ Move forward with Construction Documents